

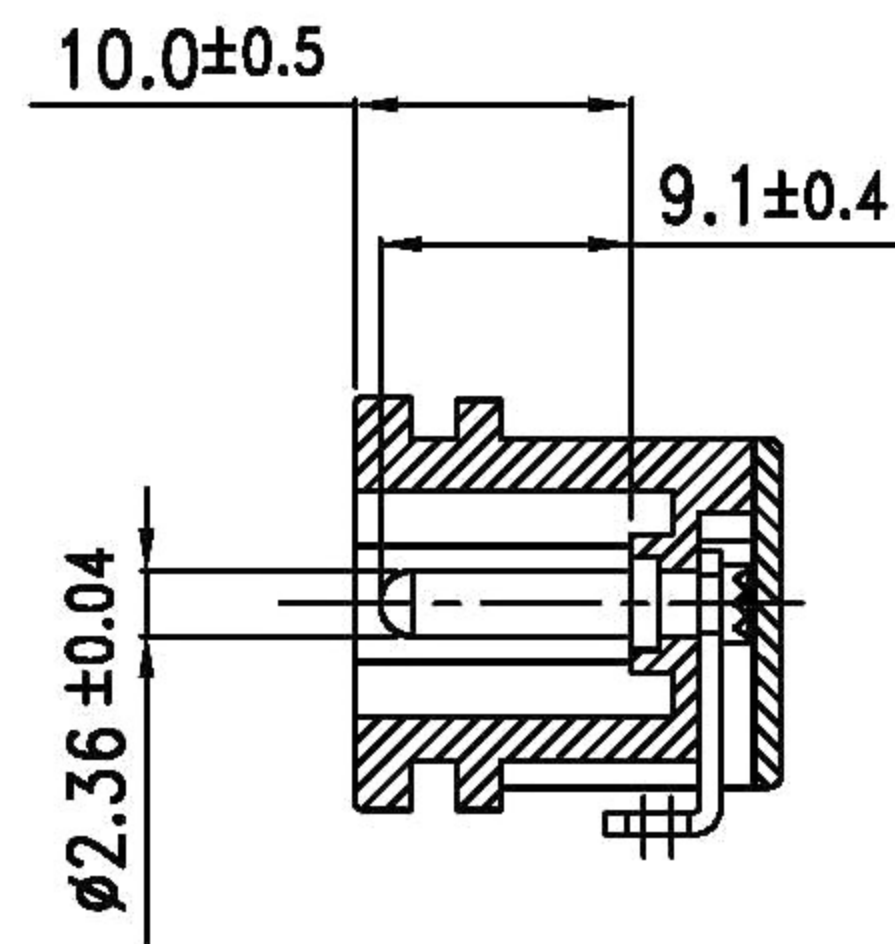
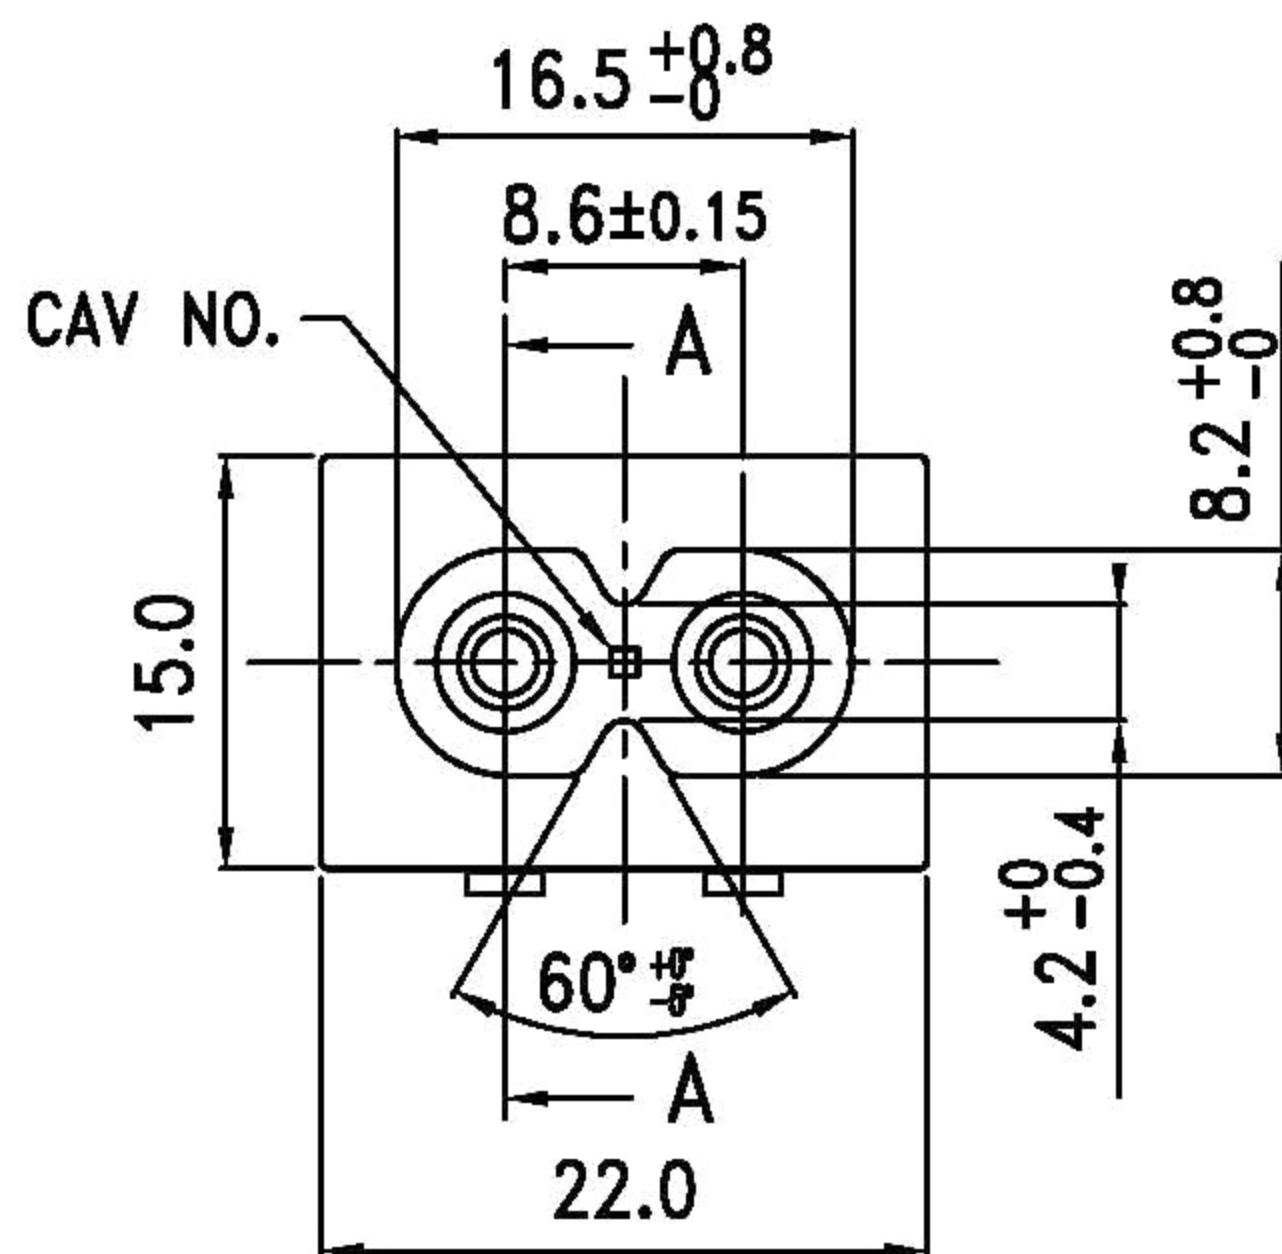


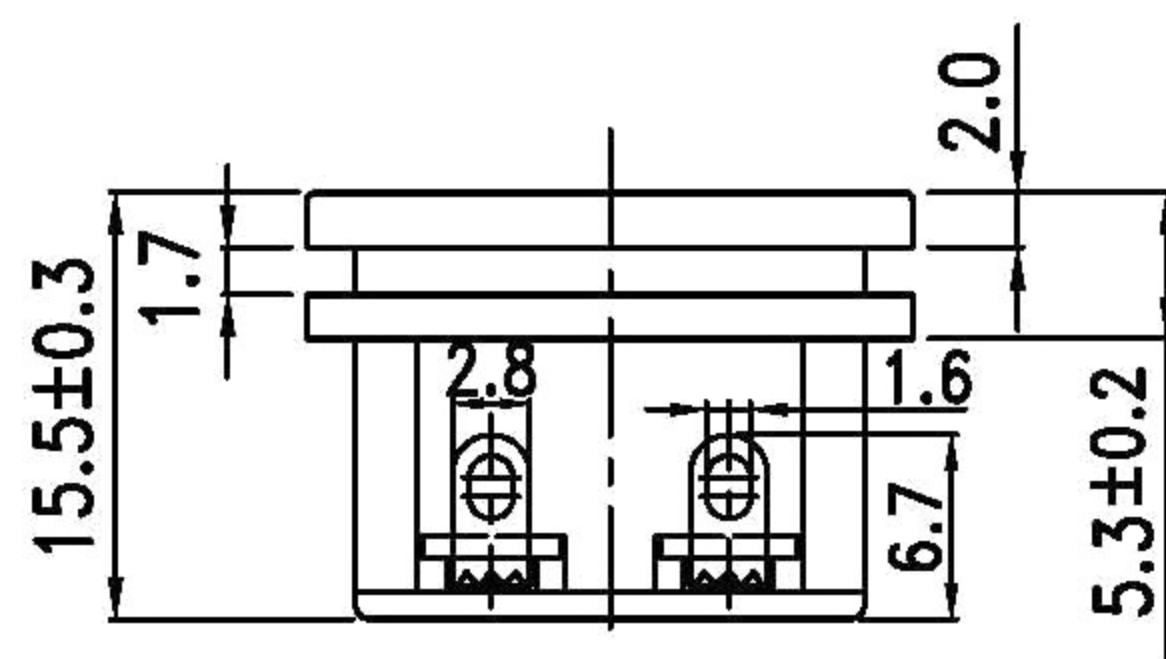

SECTION A — A

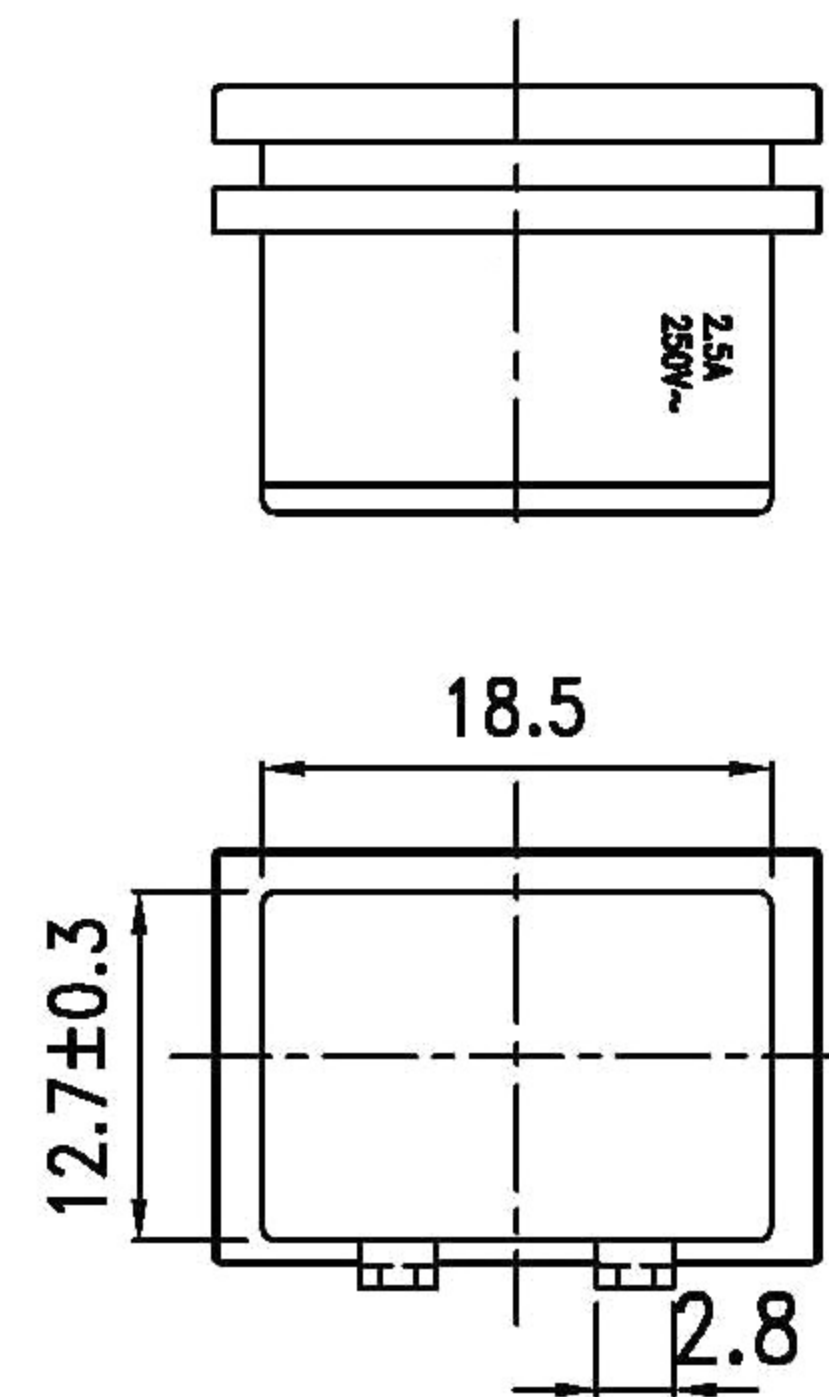

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100M Ω 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Filled Thermoplastic . UL 94V-2~0

Rating: AC 2.5A 250V	
Mark	Safety Regulation
cULus	cULus
CCC	CCC
VDE	VDE
ENEC	ENEC

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION
23552 新北市中和區中正路799號1樓
Tel : 02-2226-8001 Fax : 02-2226-8002
http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



UNIT
mm

UNIT Q'TY
1

SCALE
1:1

TOLERANCE
X.XX $\pm$ 0.1
XX.XX $\pm$ 0.2
XXX.XX $\pm$ 0.3

PRODUCT NO. SWR-201A90(B023)

REV

DRAWN BY

李
2010.9.14
小英

APPROVED BY

羅
2010.9.14
士凱

ID NO 10091405Q

INTERIM NO.

B

DESCRIPTION

NEW NO.