

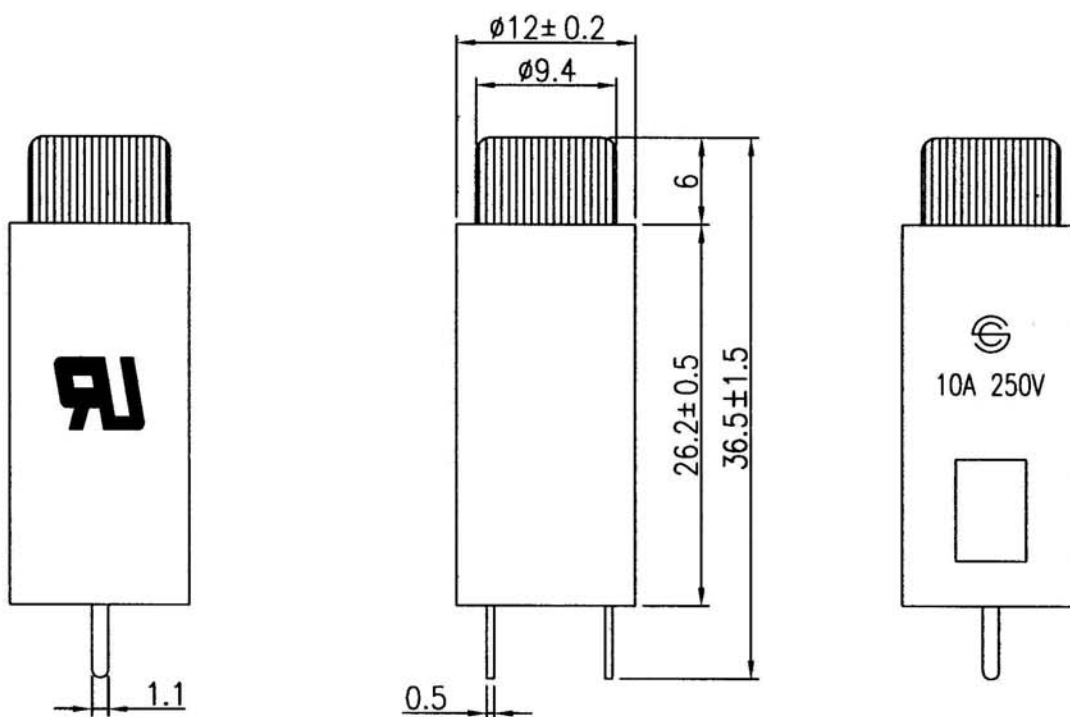


Rating	10A 250V AC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		Nil
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Bayonet type	ø5X20mm		



TOLERANCE: $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED.

									△
									△
Date	Name	Description							NO
Drawn	Checked	Approved	SCI BOM No.	1310157	Model Name	FUSE HOLDER			
曹盈芳	王伯山	研發部 97.5.26	Customer No.		Model No.	SFR3-24		REV.	
05/21/'08	5/26/08	李景煌	Unit	mm	SWEETA PRODUCTS CORPORATION			0	