
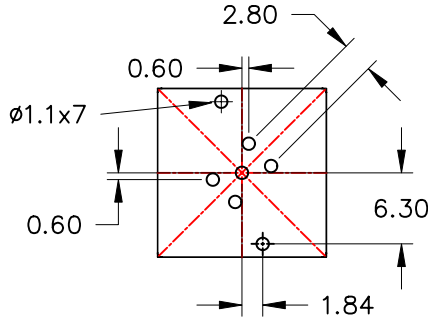
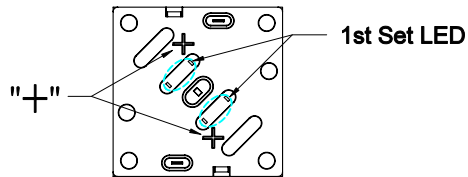



SCHMATIC

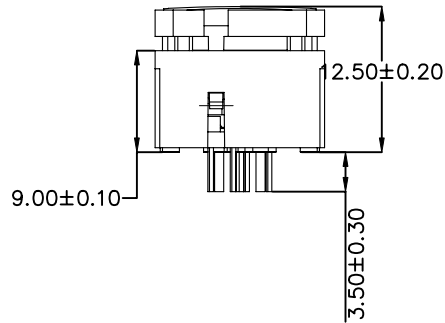

P.C. MOUNTING

SKS5CXXX0R-A

LED BRIGHTNESS	
NONE	NORMAL BRIGHTNESS
A	SUPER BRIGHTNESS

1st Set LED COLOR			
ITEM NO	EMISSION COLOR	Dominant Wavelength	Test Condition
1	White	$\lambda = 0.27 \sim 0.31 \mu\text{m}$	IF = 5mA
3	Red	$\lambda = 638 \sim 648 \text{ nm}$	IF = 20mA
5	Yellow	$\lambda = 582 \sim 592 \text{ nm}$	IF = 20mA
6	Green	$\lambda = 520 \text{ nm}$	IF = 20mA
7	Blue	$\lambda = 465 \sim 470 \text{ nm}$	IF = 20mA

LED QTY	
ITEM NO	DESCRIPTION
0	NO LED
1	ONE LED
2	TWO LEDs

SPECIFICATIONS:

RATING: 100mA max, 42 VAC/DC
MECHANICAL LIFE: 1,000,000 cycles
CONTACT RESISTANCE: 100mΩ max.(initial)
INSULATION RESISTANCE: 1000M Ω min.
DIELECTRIC STRENGTH: 1,000 VAC

MATERIALS

SWITCH HOUSING: PBT
TRANSPARENT: ABS
CONTACT: Stainless,Au plated
TERMINALS: Brass,Au plated
TERMINAL SEAL: Epoxy

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例): 1:1	TITLE 圖名	Short-travel keyswitches			SIZE 圖紙	A4
1	(A)			TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR: ± 5° FILE NAME: KS0011	DWG NO. 圖號	SKS5C1230R-A			UNIT 單位	Inch
2	(B)				REV. 版本	A	DATE 日期	JUN - 01 - 2011	SHEET 張數	1 of 1
3	(C)				CHECKED BY 審核	RICHARD			DRAWN BY 製圖	IRENE
4	(D)									
5	(E)									