
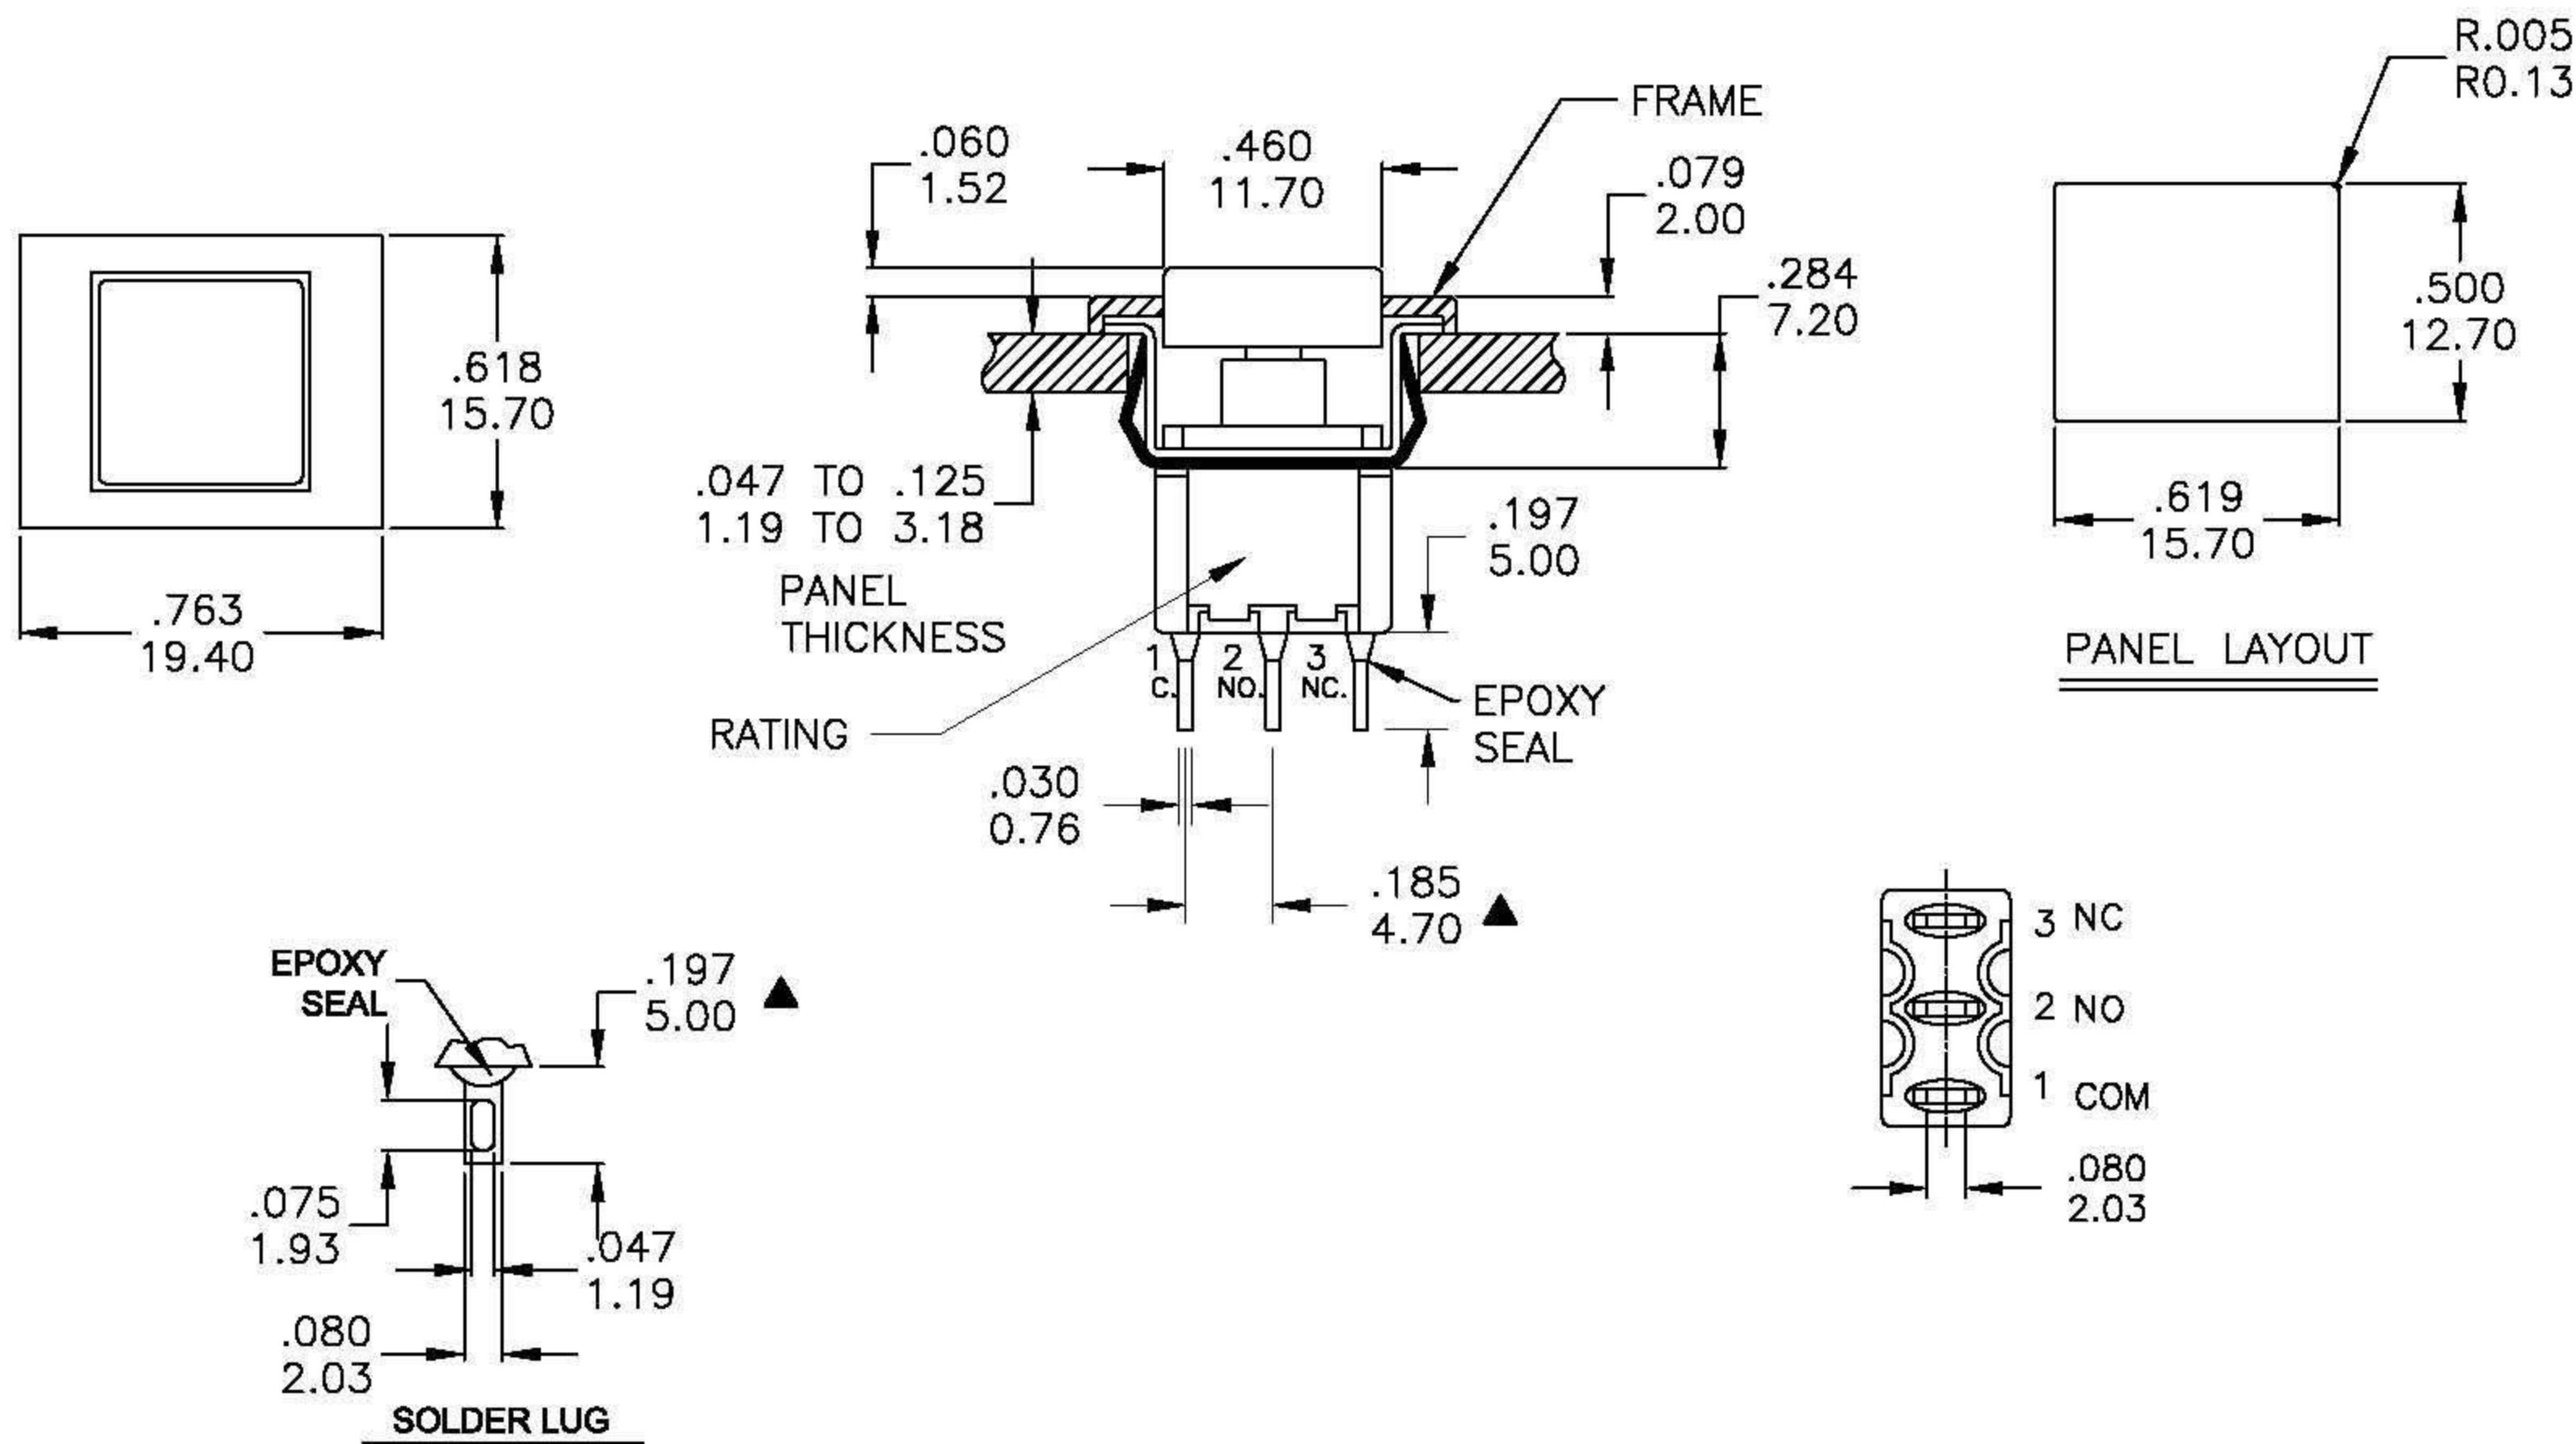





Model No.	POS.1	POS.2
		
A7	ON	MOM
Term. Comm.	1-3	1-2
SCHEMATIC		

SWITCH FUNCTION

SPECIFICATIONS

MECHANICAL LIFE: 50,000 make-and-break cycles.
CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000MΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS@sea level.
OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).
PLUNGER: Glass filled Nylon or Glass fille polyester.
BUSHING: Brass,nickel plated.
HOUSING: Stainless Steel.
TERMINAL/CONTACT:Silver or gold plated.

RATING :

R : 0.4 Volt-Amps(VA) max. @20V max.(AC or DC)
 Q : 1Amp @250VAC
 3Amps @120 VAC or 28 VDC

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例): 3:2	TITLE				SIZE	
						圖名	Snap-Acting Pushbutton Switches			圖紙	A4
1	Ⓐ				TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 5° FILE NAME : 7MSP0235	DWG NO.	A101-A7			UNIT	inch
2	Ⓑ					圖號				單位	mm
3	Ⓒ					REV.	A	DATE	JUL - 17 - 2006	SHEET	1 of 1
4	Ⓓ					版本		日期		張數	
5	Ⓔ					CHECKED BY	RICHARD		DRAWN BY	BLUE	
						審核			製圖		

版本 : C

表單編號 : QR-0507