



Rating	3A 125V AC, 1.5A 250V AC 	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Switch Function	2P SPST OFF-(ON)		



Material:

Housing: Black, Nylon#66

Button: Red, Nylon#66

Bottom Cover: Black, PBT+30%GF

Terminals: Copper Alloy

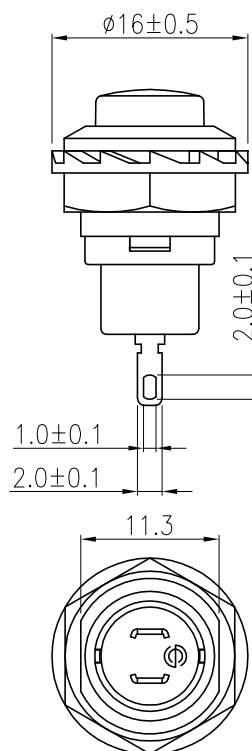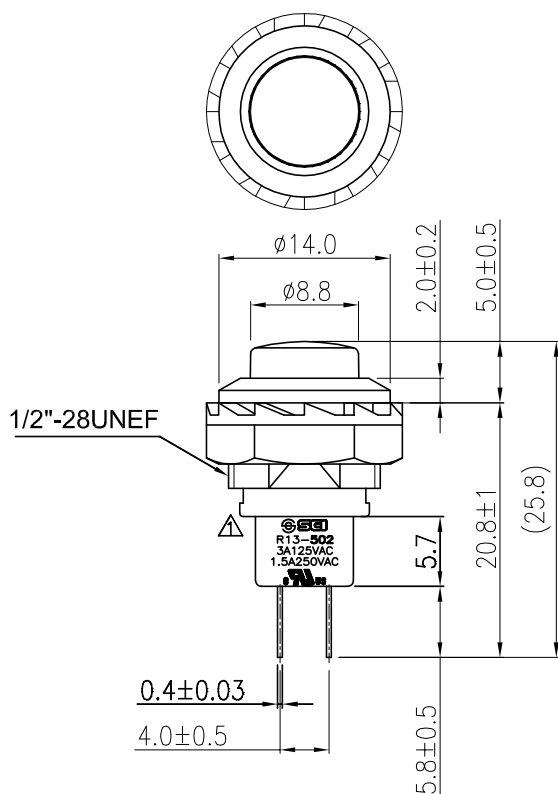

Tolerances Unless Otherwise Specified ± 0.3

							
07/30/'12	柳新強	增加SCI LOGO					
Date	Name	Description				No.	
Drawn	Checked	Approved	SCI BOM No.	1830575	Model Name	PUSH SWITCH	
柳新強	徐洲迎	李元生	Customer No.		Model No.	SPR13-502A-05	Rev.
07/30/'12	07/31/'12	07/31/'12	Unit	mm	SWEETA PRODUCTS CORPORATION		1