



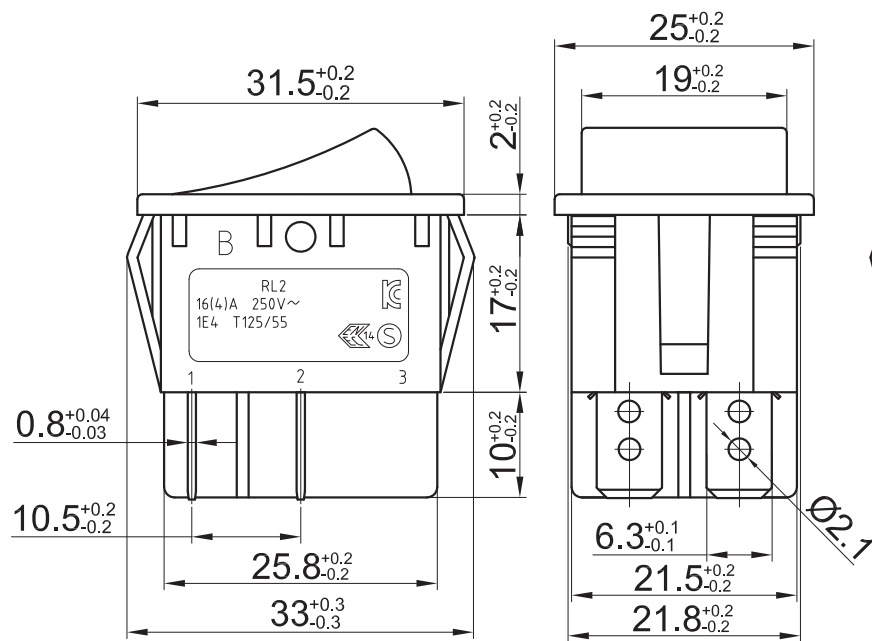


SPECIFICATION


- RATING:UL C-UL:16A 125VAC
ENEC SEMKO:
16(4)A 250VAC T125/55 1E4
- CIRCUIT:ON-OFF W/Lamp DPST 4P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:300~800gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	30
1.25-2.0	30.2
2.0-3.0	30.5

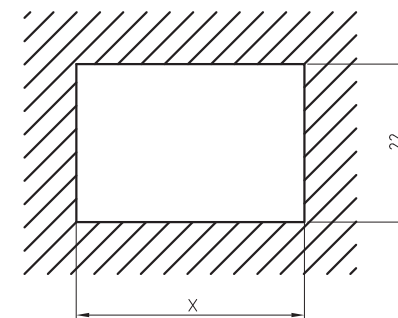

CIRCUIT DIAGRAM

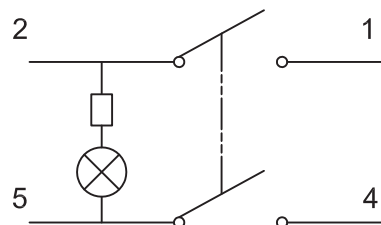

MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:PC UL 94HB
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO₂In₂O₃ (10) /Cu

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

设计	签名	年月日	标准化	签名	年月日
制图	符辉	16.07.19			
审核	张雪飞				
工艺			批准		

SRJS-608FALKDFT2C-3

TITLE	SERIES
ROCKER SWITCH	RL2-3
	FUNCTION
	ON-OFF W/Lamp
VIEWS TYPE	DRAWING NUMBER
	RL2-321/N-C-2-RE/BK-P2 (B)