

Panel Cutout

# Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute

Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.





Rating : 15A 12V DC / 10A 24V DC

Function: ON - OFF - ON DPDT Illuminated

POS 1  
Red Lens

POS 3  
Amber Lens

POS 1 POS 2 POS 3

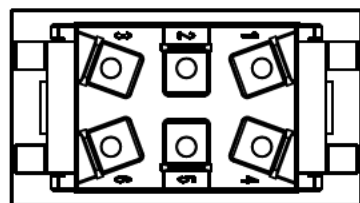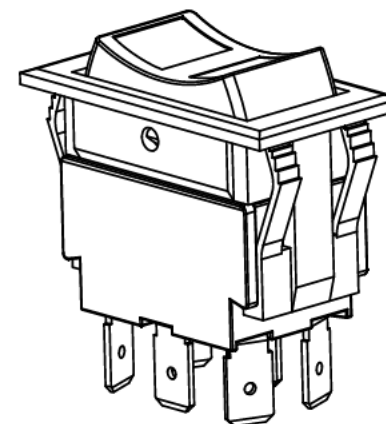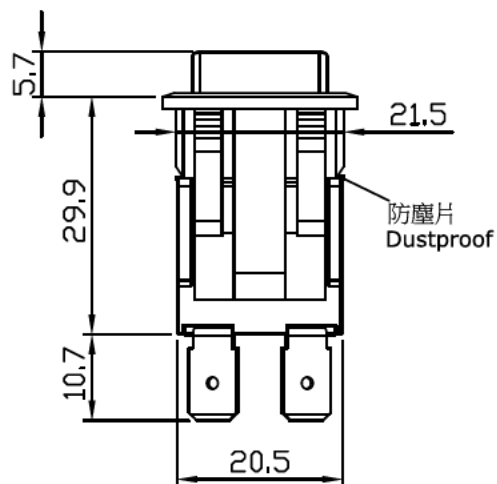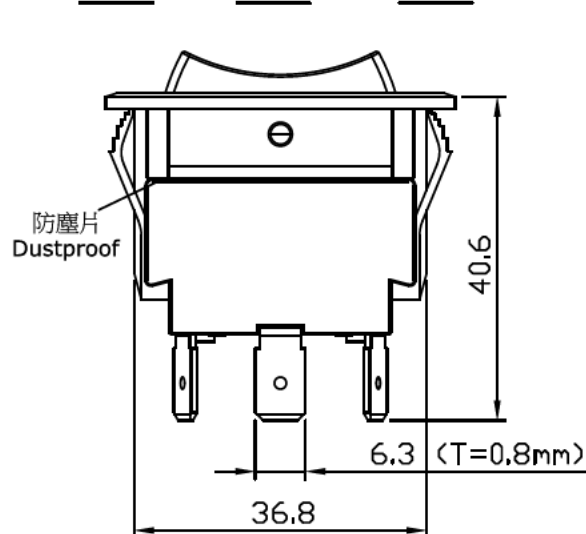

| TOLERANCES                       |            | UNLESS NOTED        |          |
|----------------------------------|------------|---------------------|----------|
| X.                               | ± 0.3      | MIN WALL THICKNESS  |          |
| X.X                              | ± 0.2      | MAX. DRAFT 2 / SIDE |          |
| X.XX                             | ± 0.1      | ALL RADII           |          |
| DATE:                            | DRAWN:     | PROJ:               | EX.NO.   |
| 5-28-2010                        | C. H. SHIU | W.D. CHEN           |          |
| NAME Rocker Switch (Illuminated) |            |                     |          |
| UNIT                             | SCALE      | PROD. NO            | REV.     |
| ■ m/m □ inch                     | 1 : 1      | SRSW-2706-A3-2L-W   | W.H. YEH |

喜威達企業股份有限公司  
SWEETA PRODUCTS CORPORATION

Material :

Finished :