


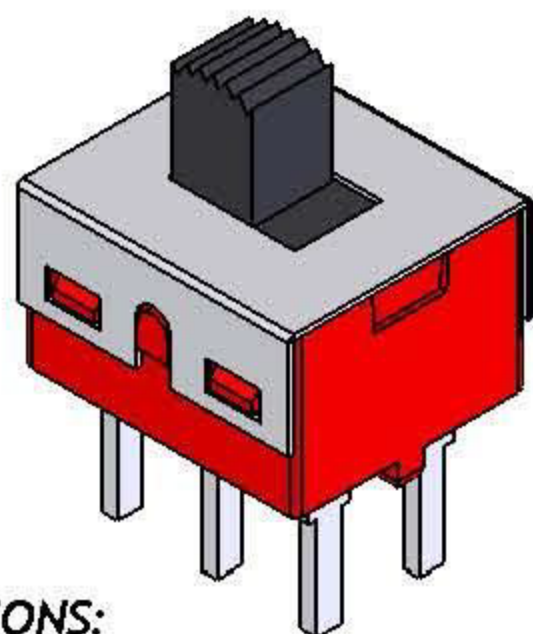


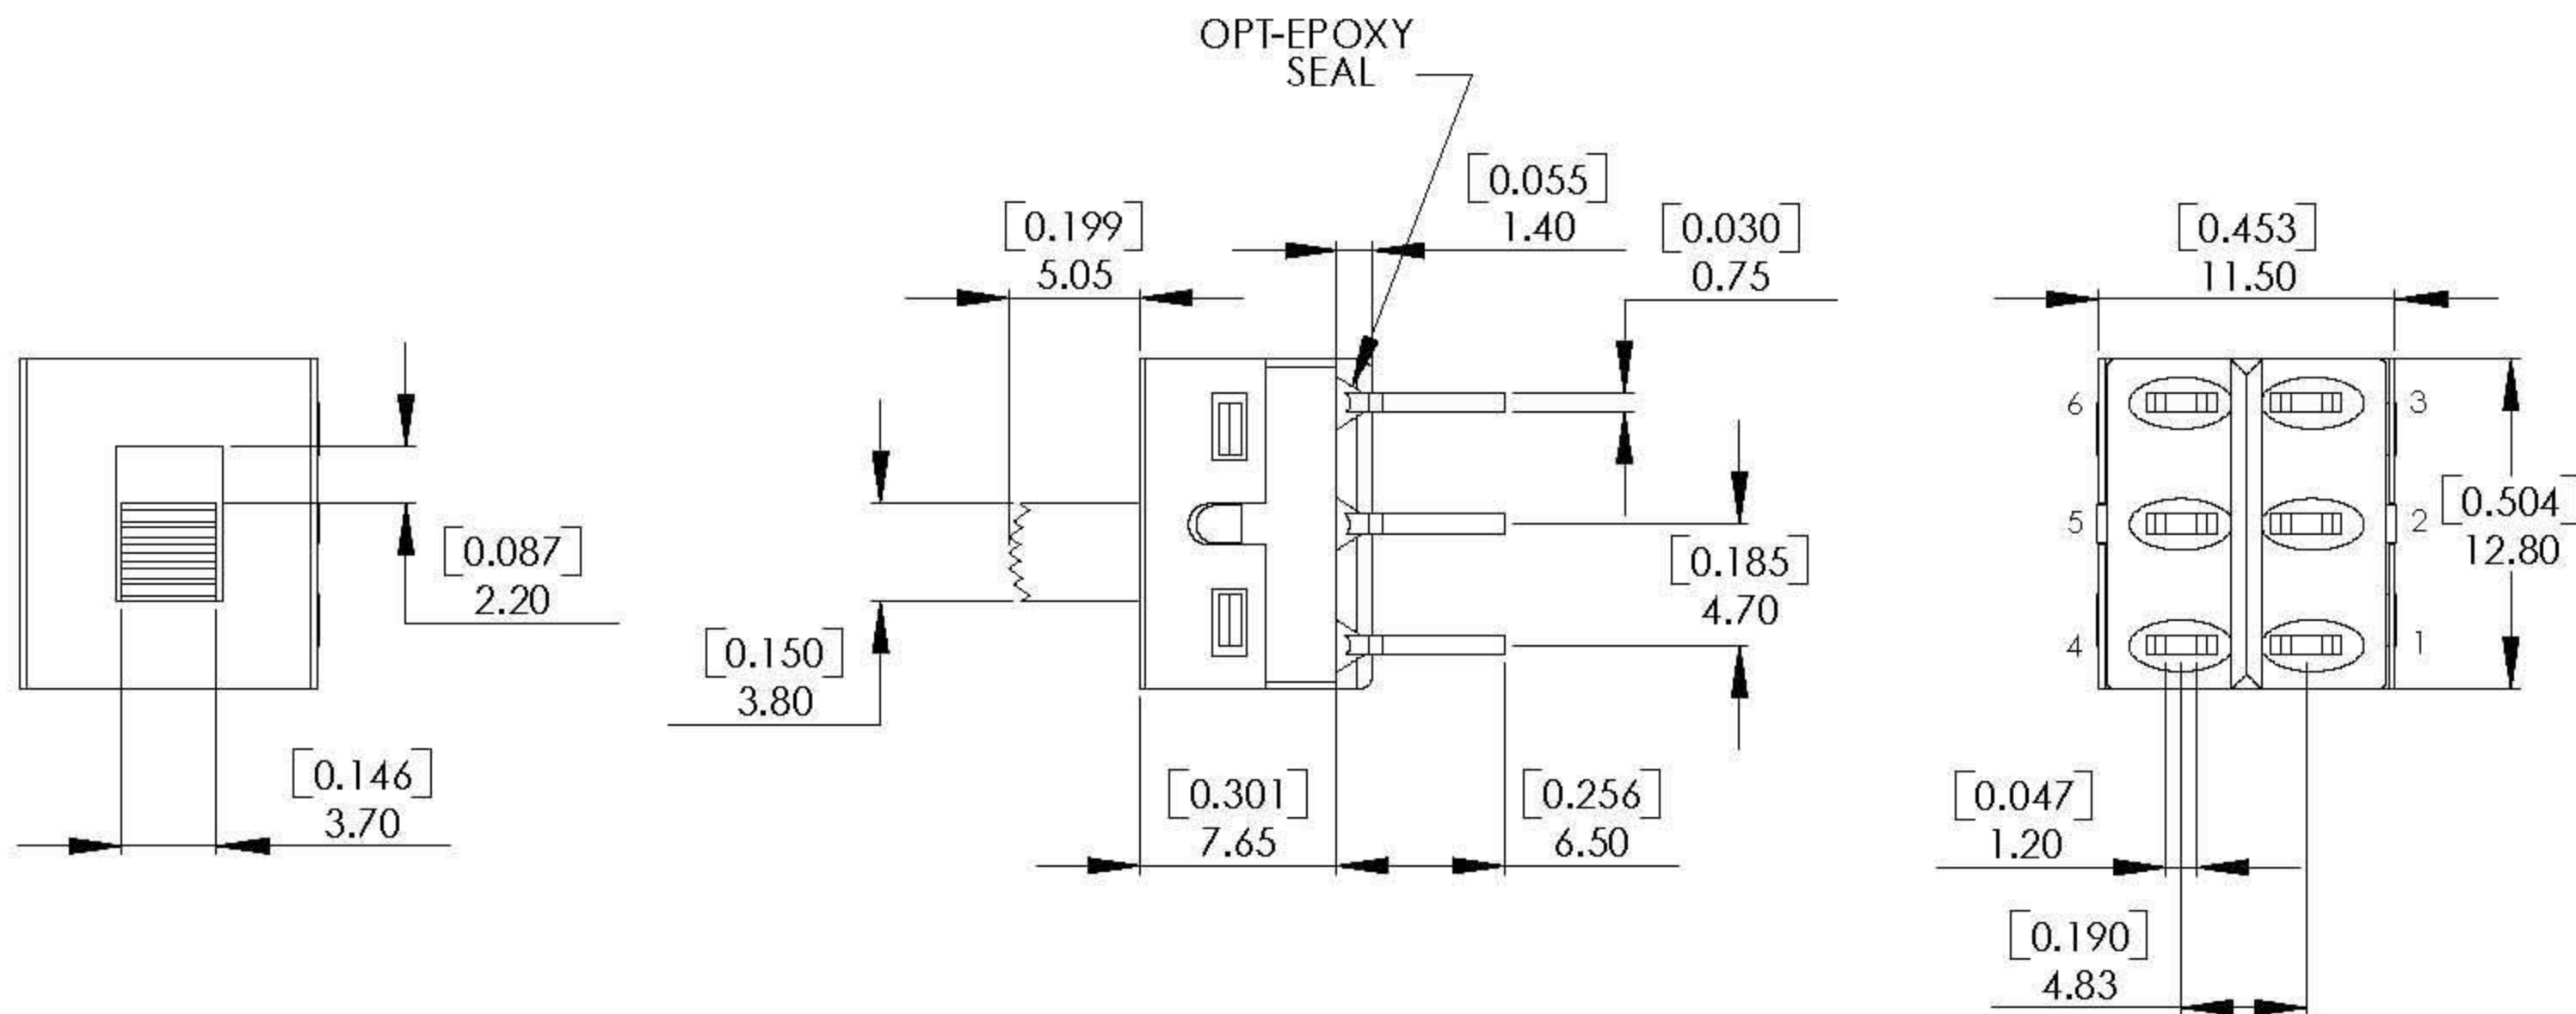

P.C. MOUNTING

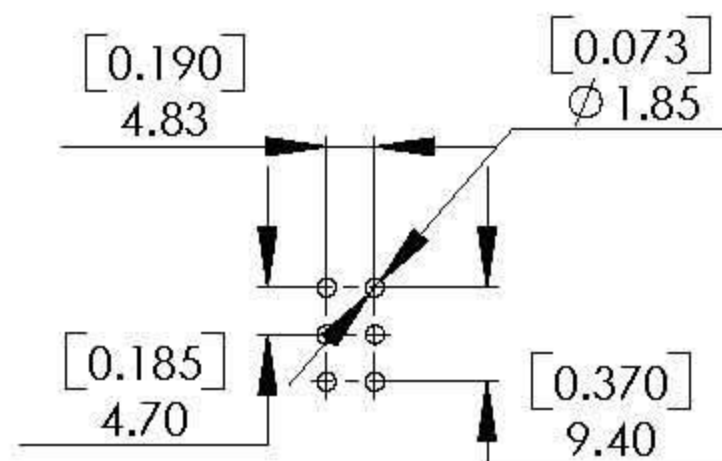

Schematic

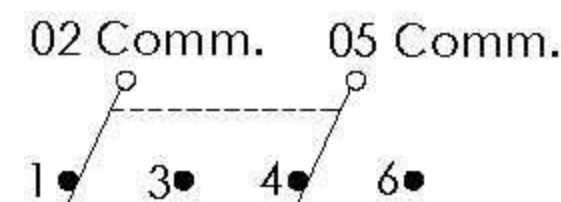

SPECIFICATIONS:

CONTACT RATING : 6 AMPS @ 120 V AC or 28 V DC.
 3AMPS @ 250 V AC or 0.4 AMPS @ 20V AC or DC
 ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 m Ω max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 M Ω min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 $^{\circ}$ C to 130 $^{\circ}$ C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : Nylon.
 BUSHING : Brass, nickel plated.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver
 SWITCH SUPPORT : Brass, tin plated.

Model NO.	TYPE		
MSDS-11C	ON	NONE	ON
Tem. Comm.	2-1 5-4	OPEN	2-3 5-6

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓
 Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net

ITEM NO	MSDS-11C-A2	DATA		TOLERANCE
CHECKED BY		DRAWN BY		.XX $\pm$ 0.5
				X. $\pm$ 0.2
				.X $\pm$ 0.2
				.XX $\pm$ 0.05