
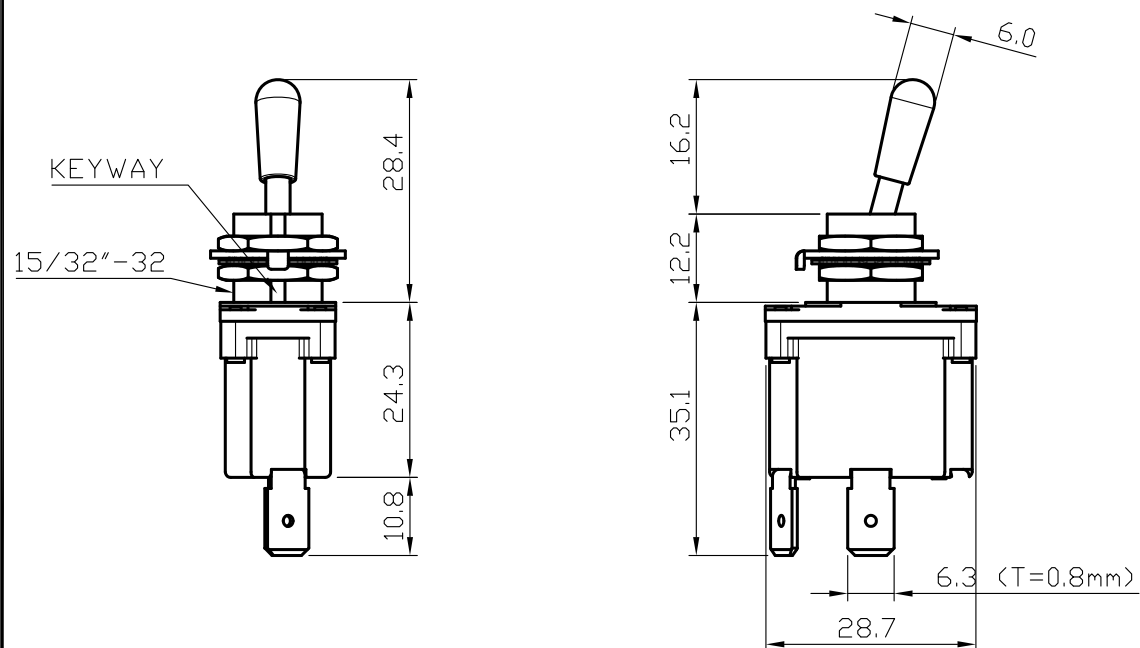



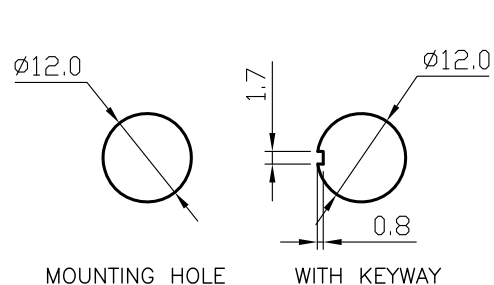

Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute


Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating : 12A 125V AC/ 10A 250V AC

1/2HP 125VAC/1HP 250VAC/5A 125VAC 'L'

Circuit: OFF - ON SPST

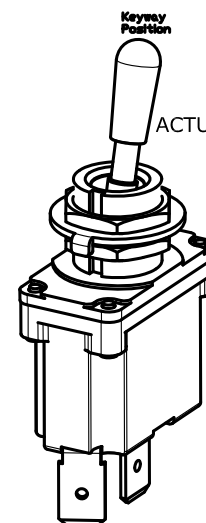

ACTUATOR: BRASS WITH DULL NICKLE PLATED

TOLERANCES X. ± 0.3 X.X ± 0.2 X.XX ± 0.1		UNLESS NOTED MIN WALL THICKNESS MAX. DRAFT 2 / SIDE ALL RADII	
DATE: 3-23-2009	DRAWN: C.H. SHIU	PROJ: W.D. CHEN	EX.NO.
NAME Sealed Toggle Switch			
UNIT ■ m/m □ inch	SCALE 1 : 1	PROD. NO S1TC-B12	REV. W.H. YEH

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Material :

Finished :